

VACUUM & PRESSURE PRODUCTS FOOD & PRODUCT PACKAGING

Packaging Industry







Food Vacuum Packaging

■ Tray Forming/Sealing

- Food trays are formed under vacuum molding from rolls of plastic film
- Food product (ground beef for example) is placed in the formed tray for sealing
- Clear plastic sealing is applied and vacuum is used to extract the air from the package
- Often times certain gas mixtures are introduced back into the tray to extend shelf life
- This process is known as Modified Atmospheric Packaging (MAP)
- Special "oxygen rated" vacuum pumps must be used for this MAP process

V-Series

Rotary Vane

- Compact footprint
- · Low noise level
- · Long life vanes
- Oil-free or lubricated designs
- Extended maintenance intervals

S-Series

Screw



- Continuous variable pitch screws
- Short evacuation times
- Oil-free compression
- High water vapor tolerance
- Minimal maintenance costs

L-Series

Liquid Ring

- High resistance to corrosion
- Contact-less operation
- Increased water carry-over models
- UL/CSA approval
- 50/60 Hz motors as standard
- Available in partial or closed circulated







V-VC | V-VCS





V-VTR



S-VSI




S-VSI



L-BL2



L-BV5

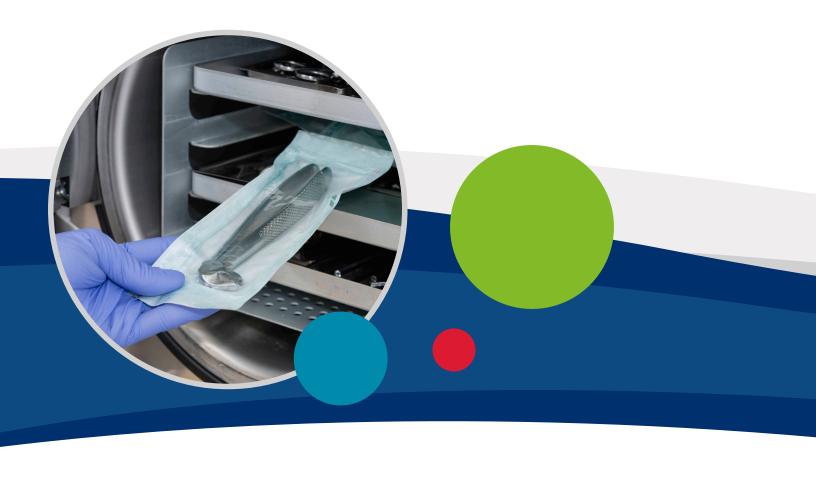

Vacuum Packaging

■ Package Evacuation

- Meat, fish, cheese portions are placed into a vacuum bag for consumer packaging
- Bags are placed in a vacuum chamber machine, chamber lid closes and a vacuum applied
- When air is removed from the bag and the final vacuum is reached, bag is then heat sealed closed
- Removal of the air ensures the longest shelf life and appearance for the consumer
- Vacuum packaging use has now been extended to many other consumer products

V-Series

Rotary Vane

- Compact footprint
- Low noise level
- Long life vanes
- · Oil-free or lubricated designs
- Extended maintenance intervals

S-Series

Screw



- Continuous variable pitch screws
- Short evacuation times
- Oil-free compression
- High water vapor tolerance
- Minimal maintenance costs





V-VC | V-VCS



V-VTR



S-VSI





Vacuum Packaging

■ Trim Removal

- Food packaged via continuous plastic roll stock (blocks of cheese for example) are individually cut
- After one package is cut away from the continuous roll, there is a scrap plastic strip remaining
- Vacuum is used to suction the plastic trimmings away from the packaging machine
- Elmo Rietschle has a vacuum blower solution which provides the vacuum and collects the scrap

F-Series

Radial



- Aluminum cast housing and impellers
- Cost efficient and robust
- Life-time lubricated bearings
- Process safe and resilient
- Quiet and low vibration operation







Packaging

■ Filling & Closing Machines

- Vacuum filling is used for such products as beverages, cosmetics & pharmaceuticals
- · Air is removed simultaneously as the product is filled into the container
- Removal of the air speeds up the filling process and extends the shelf life of the
- Air is removed from pharmaceuticals and cosmetics to ensure product purity

Labeling

- Automated machines place adhesive labels to products and packaging
- Vacuum is used in conjunction with suction cups to pick and place labels

Volume Reduction

- Foam type products and clothing are reduced in volume by means of vacuum
- Vacuum bagged items take up less space for transport and storage

G-Series

Side Channel



- Contact-less operation
- · Quiet operation
- Tolerant to dust ingestion
- UL/CSA approved
- Service intervals up to 40,000 hours
- 50/60 Hz motors as standard

L-Series

Liquid Ring



- · High resistance to corrosion
- Contact-less operation
- · Increased water carry-over models
- UL/CSA approval
- 50/60 Hz motors as standard
- Available in partial or closed circulated

V-Series

Rotary Vane



- · Compact footprint
- · Low noise level
- Long life vanes
- Oil-free or lubricated designs
- Extended maintenance intervals

C-Series

Claw



- · Long up-times
- · Maintenance friendly
- Dry running and contact free operation
- · Targeted discharge of cooling air
- Process safe and resilient
- High efficiency

S-Series

- Screw
- Continuous variable pitch screws
- Short evacuation times
- Oil-free compression
- High water vapor tolerance
- Minimal maintenance costs





G-BH1



G-BH2



L-BL2



L-BV5



V-VC | V-VCS



V-VTR



C-VLR ZEPHYR







S-VSI

Packaging

■ Packaging Materials

- Many common packaging materials are formed using vacuum
- Examples include bubble wrap and inflatable bag packaging materials

■ Blister Packaging

• Vacuum is often used to assist with the formation of consumer packaged goods

G-Series Side Channel



- Contact-less operation
- Quiet operation
- Tolerant to dust ingestion
- UL/CSA approved
- Service intervals up to 40,000 hours
- 50/60 Hz motors as standard





G-BH1



G-BH2



The leader in every market we serve by continuously improving all business processes with a focus on innovation and velocity



www.ElmoRietschle.com

©2024 Industrial Technologies and Services, LLC.
Printed in U.S.A.
ER-APP-PKG 2nd Ed. 2/24







